

ϽϒΕΕΝ ONE STOP BATHROOM SOLUTION

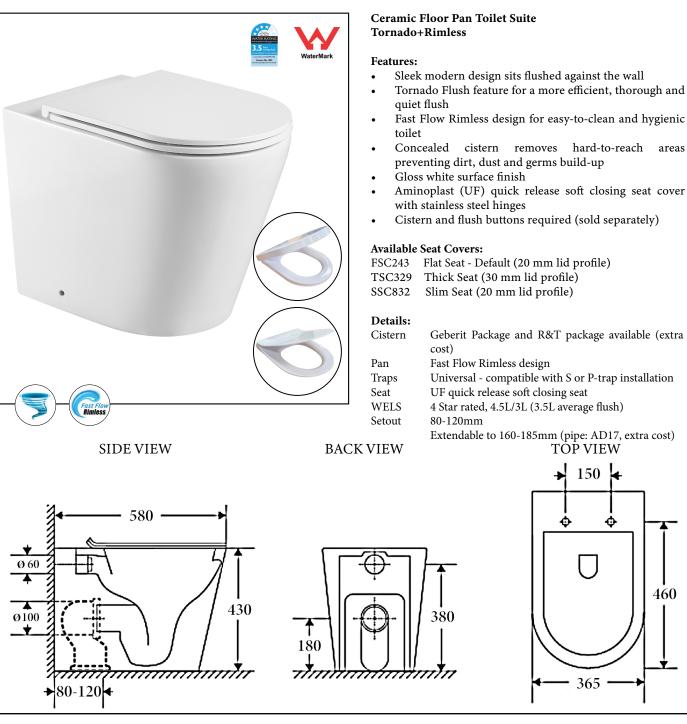



TOP VIEW

Additional Information

- Installation should be in accordance with AS/ NZS3500 standards.

- In order to fully benefit from warranty claims, please ensure products are installed by a licensed plumber.

- All measurements are in millimeters.

-Dimensions are nominal and subject to normal ceramic manufacturing variations. Please allow +/- 15 mm tolerance.

- For mark-ups & roughing-in, always use actual product measurement.

- Specifications may vary without notice as part of our continuous improvement practices.

Maintenance & Care

- Toilet seat cover can be removed for cleaning by pressing quick release buttons and lifting up.

- Clean with a toilet brush or soft cloth/sponge using warm water and mild soap or detergent.
- Do not use any abrasive cleaners, liquids or pastes.
- Do not use solvents or corrosive liquids.

- Please do not close the seat cover forcibly to extend the soft-close function lifespan.

Installation Manual Video



BESTBM.COM.AU

NOVEEN IS BROUGHT TO YOU BY